



Product APPLICATION Guide



SPEAKER HORNS & LOUDSPEAKERS For Paging & PA Systems



PH-143Q

Features



- 10 Watt; 8 Ohm
- 500 - 7000 Hz Frequency Range
- Durable Plastic Case- Black
- Indoor / Outdoor Use
- 74 x 104 x 114 mm (2.9 x 4.1 x 4.5 in)



PH-150Q

Features

- 30 Watts; 8 Ohm
- 500 - 7000 Hz Frequency Range
- Durable Plastic Case- White
- Indoor / Outdoor Use
- 120 x 200 x 235 mm (4.7 x 7.9 x 9.3 in)




PH-180Q

Features

- 10 Watts; 8 Ohm
- 500 - 7000 Hz Frequency Range
- Durable Plastic Case- Black
- Indoor / Outdoor Use
- 88 x 105 mm (3.5 x 4.1 in)


Speaker Horns & Loudspeakers Con't

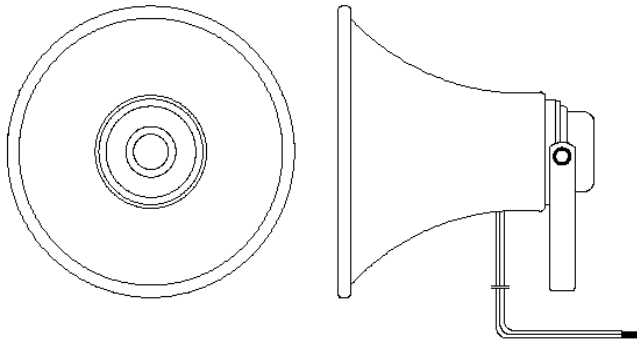

PH-230Q

Features

- 15 Watts; 8 Ohm
- 350 - 7000 Hz Frequency Range
- Rugged Aluminum Case- Gray
- Indoor / Outdoor Use
- 156 x 132 mm (6.1 x 5.2 in)

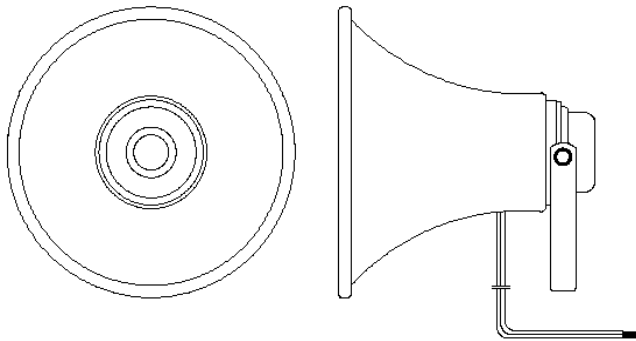

PH-260Q

Features

- 25 Watts; 8 Ohm
- 500 - 7000 Hz Frequency Range
- Rugged Aluminum Case- Gray
- Indoor / Outdoor Use
- 264 x 235 mm (10.4 x 9.3 in)

Specifications:

Impedance:	8 $\pm$ 2 Ohms
Input Power:	10 to 30 Watts RMS (See Datasheet)
Frequency Range:	500 to 7000 Hz
Operating Temp:	-20°C to +70 °C
Storage Temp:	-30 °C to +80 °C
Case Material:	Plastic- ABS 757 or Gray Aluminum (See Datasheet)
Wire Gauge:	20 AWG
Applications:	Indoor / Outdoor; Paging; PA Systems; Industrial Plants; Warehouses; Schools; Construction Sites; Transportation Terminals; Recreational Areas

Call 317-612-1000 or Visit www.mallory-sonalert.com for More Details